METEORA-S







Net Weight	Dimensions carton L x W x H	Qty outer carton			
256 grams	8 x 7 x 24 cm	24			

Housing Aluminium, die cast 9004 (Black), 9003 (V

9004 (Black), 9003 (White), 1036 (Gold)

Fixture type 3-phase track light
Module Bridgelux V6 LED

TRIAC dimmable driver

 Lumen output
 500lm, 700lm

 CCT
 2700K, DTW (3000K-2000K)

CRI >90Ra **Beam angles** 15°, 24°, 40°

Adapter Powergear® 3-phase adapter included

Rotatable 350º Tiltable 90º

Expected Lifetime >50.000h (L80/B50) **Photobiological safety** RG1 unlimited

Power factor > 0.9 UGR < 19 Colour consistency 3 SDCM

Warranty 3 years warranty on LED module and driver

LED MODULES

Standard DTW



OPTIONS

Dimmable





Casambi

LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	сст	CRI	Description	Lumen	Watt	Lm/W	сст	CRI
Bridgelux V6	700Lm	8W	73	927	>90Ra						
Bridgelux V6 DTW	500Lm	8W	73	3000K-2000K	>90Ra						

LED modules

Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K

Premium White (PW): for fresh white and depth of colour in retail environments

1) Lumen output of LED module (COB)

2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT. The power of the complete fixture will be slightly higher due to the power consumption of the driver.

3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value. Technical data can be changed by Internova without prior notice.


It all starts with light

METEORA-S





ARTICLE CODE STRUCTURE

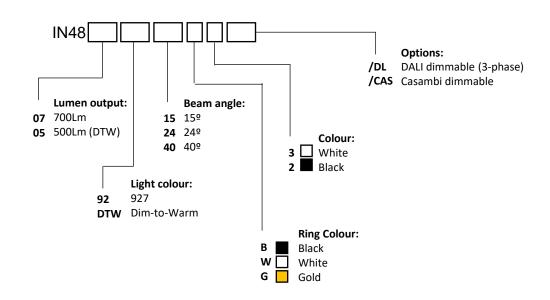

POLAR DIAGRAMS

